





Maintenance

The floor should be vacuumed regularly and occasionally cleaned using a soft-dampened brush or cloth bristles.



Easy to repair

Superficial scratches can be removed by sanding the affected area and applying the repair oil. Soft scratches can be repaired easily with refresher oils.



Underfloor Heating

FairOak Floor can be combined very well with floor heating when keeping in mind specific instructions for installation of floor heating together with solid flooring. The general rule says that the water in the system of floor heating must be limited to maximum 45C where increasing or lowering of the floor heating temperature must be always gradual. It is also important that the relative humidity in the space where the floor is being installed needs to be between 50 and 65 %.

HABSONS
ARCHITECTURAL

Habbouche bldg., Industrial City
Bauchrieh, Beirut - Lebanon
P.O.Box: 90208
Ph: +961 1 497205 - 497228
Fax: +961 1 492710
Email: habsons@cyberia.net.lb
www.habsons.me



FairOak Flooring

MADE IN NATURE

CATALOG

HABSONS
ARCHITECTURAL

Fairoak Flooring

Oak is a very popular tree, known for its resistance, longevity and achievable dimensions. The oak tree provides a very hard and dense wood suitable for a wide range of applications. It will always remain the symbol of Strength and Durability.

A traditional material for Modern Living

With all the latest finishing options, OakFair Flooring will offer you the best flooring for your home, office or any space needing to be covered.

Warmth	A homely feeling any time during the year
Safety	For walking barefoot or for children to play on
Ageless	Providing a timeless service life
Uniqueness	Every piece of wood has its unique color, character and structure

Quality

FairOak Flooring is made to the highest standards. This quality is achieved by year after year of improvements, specialized knowledge and development.

Competitive Prices

With FairOak flooring, our product management and pricing policies insure that the client is getting the best quality at the best price resulting in the best value for money.

Safety

There is probably nothing in homes that you touch as often as the floor. Children will sit and play on it while people will walk bare feet on it. All the materials used in making and finishing our products are tested for chemical content and VOC and are graded to the highest safety standard (A+).

Solid Flooring

Specifications


- 15 to 20 mm of real oak thickness to provide a timeless life
- Our flooring boards are machined to very accurate dimensional tolerances reducing selection and fitting time

Profile	Thickness	Width	Length	Min. Length	Layers in Parcel	Full Length	Broken Length
T&G	15	90	1450	300	8	3-4	4-5
T&G	15	120	1800	350	7	3	4
T&G	15	150	1890	490	6	2-3	3-4
T&G	20	180	2200	500	5	2	3
T&G	20	200	2200	500	5	2	3
Click	15	88	1200	300	8	3-4	4-5
Click	15	118	1200	300	7	3	4

Measures are mentioned in mm

3-Layer Engineered Parquet

3-layer parquet consists of three layers of natural wood, placed in differing directions, permanently bonded by means of ecological adhesives. The decorative layer of the product is sanded down and coated with several varnish layers. The added stability allows dimensions that cannot be reached with solid parquet.

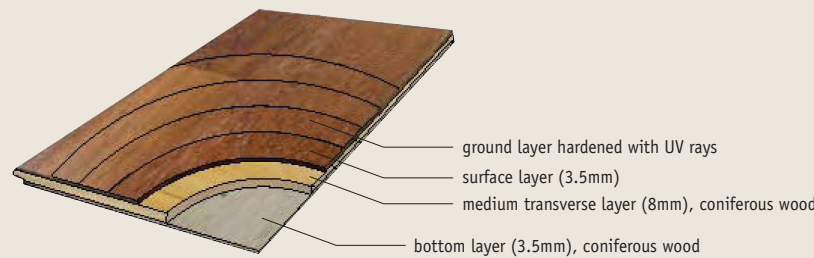

Specifications

Our engineered parquet comes in 2000x194x15 mm. Surface layer (3.5 mm), medium-transverse layer (8 mm), bottom layer (3.5 mm) with the click system. This parquet is easy to install, without special tools or knowledge. Click-system Provides quick and clean assembly without use of glue. Damaged board can be easily replaced with new one.


T&G versus Click

While Click locking systems is relatively new on solid wood flooring, tongue and groove has been the accepted standard for many years. Below are the advantages of each.



Pro's for click

Much quicker to complete a floated installation
No messy glues
Less skill required to install
Less chance on future gaps because of humidity changes in the room

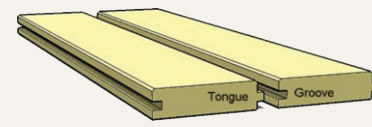

Pro's for T&G

More suitable to environments where there are extremes in humidity and temperature
Professional installation of T & G using glue will make your floor more silent and comfortable
Can be installed on joists. (Click profile always requires flat underfloor for installation)

Skirting program

FairOak skirting boards are available in colors corresponding to floor collections. Standard dimensions are:



- 15x45x2400 mm
- 15x60x2400 mm
- 15x75x2400 mm

Standard Colors

Havana

Black

White

Natural

Dark oak

Pure

Mud light

Mahogany

Chocolate

Teak